
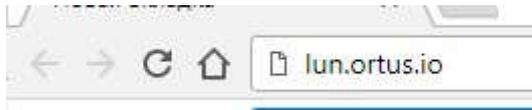


## Lun-25. Working with the website lun.ortus.io

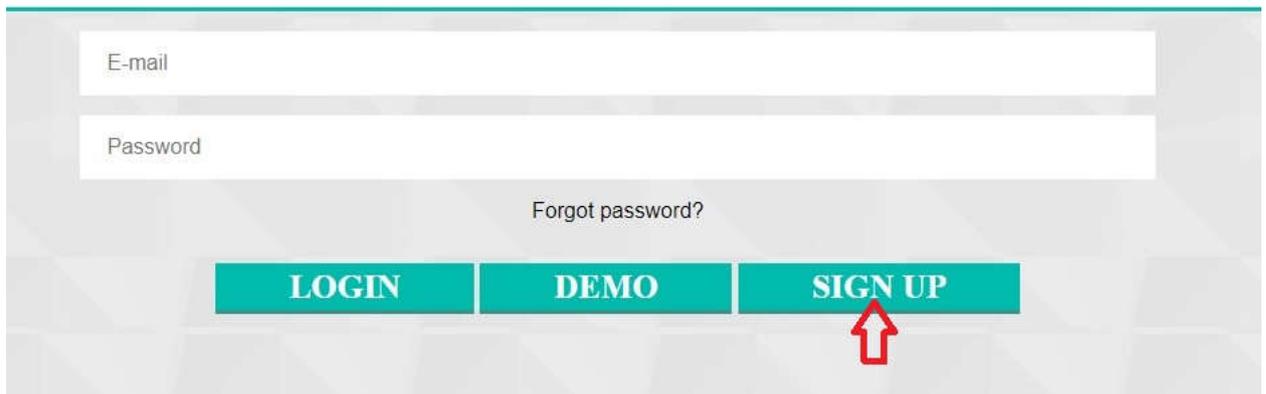

Open website: lun.ortus.io

A screenshot of the website's login/sign-up page. It features two input fields: "E-mail" and "Password". Below the fields is a link that says "Forgot password?". At the bottom, there are three teal buttons: "LOGIN", "DEMO", and "SIGN UP". A red arrow points upwards to the "SIGN UP" button.


Click the sign up button

A screenshot of the registration form on the website. The form consists of several input fields and a checkbox, each with a red arrow and a number indicating a step in the process:

- Step 1: E-mail field
- Step 2: Password field
- Step 3: Confirm password field
- Step 4: Phone number field
- Step 5: "I'm not a robot" checkbox (with a reCAPTCHA logo)
- Step 6: "SIGN UP" button


At the bottom, there are three teal buttons: "SIGN UP", "RESET", and "BACK".

1. Enter your email address
2. Enter the password
3. Retype the password
4. Enter your contact phone number
5. Set the option to confirm that you are not a bot.
6. Click the registration button and check your mailbox

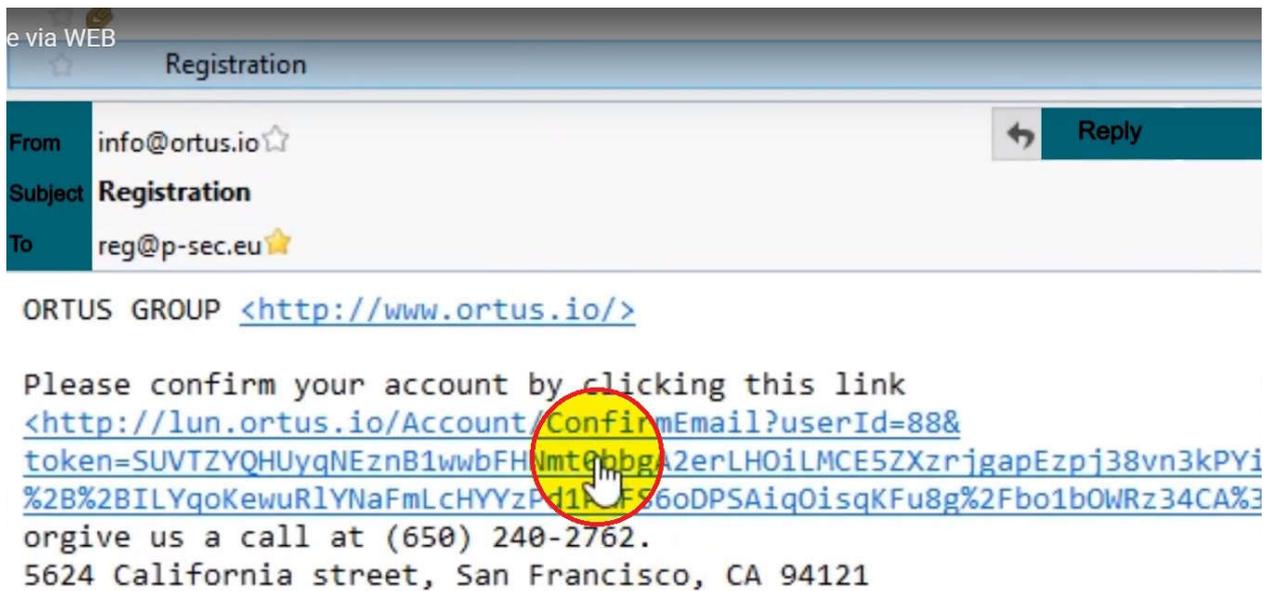


7.


Click the link in the email that will come to your inbox.

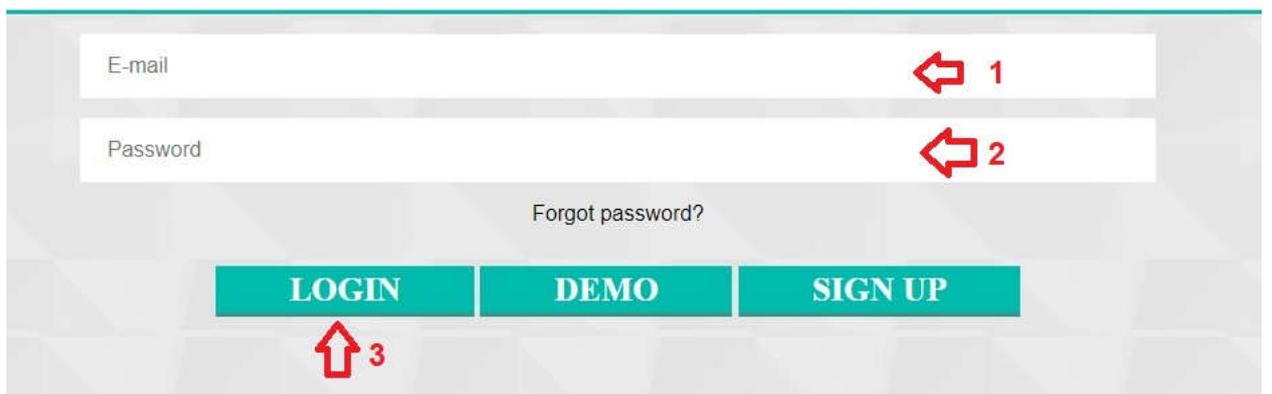

1. Enter email address of your mail which was used at registration
2. Enter the password you used when registering
3. Click the "Login" button to enter the site

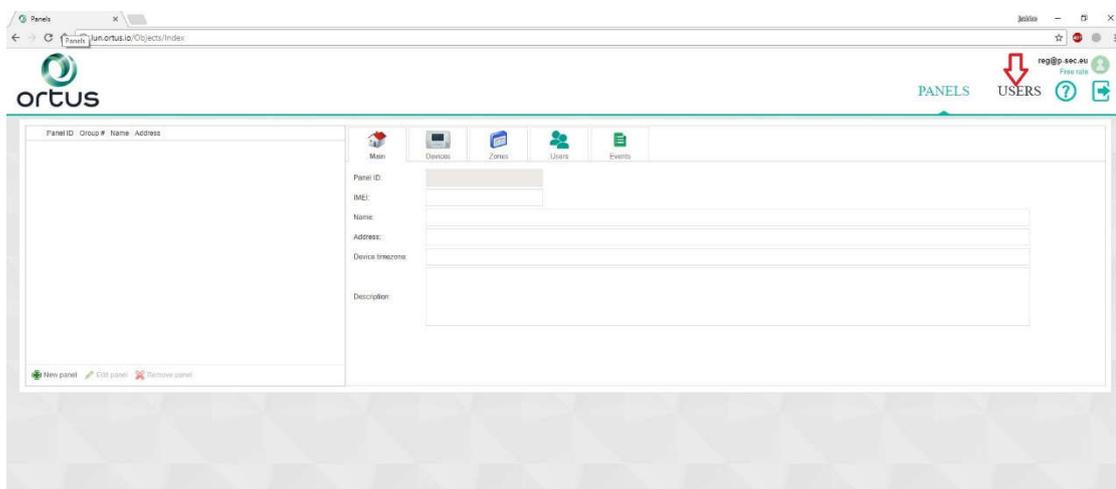

Click "User" to go to the "User" section

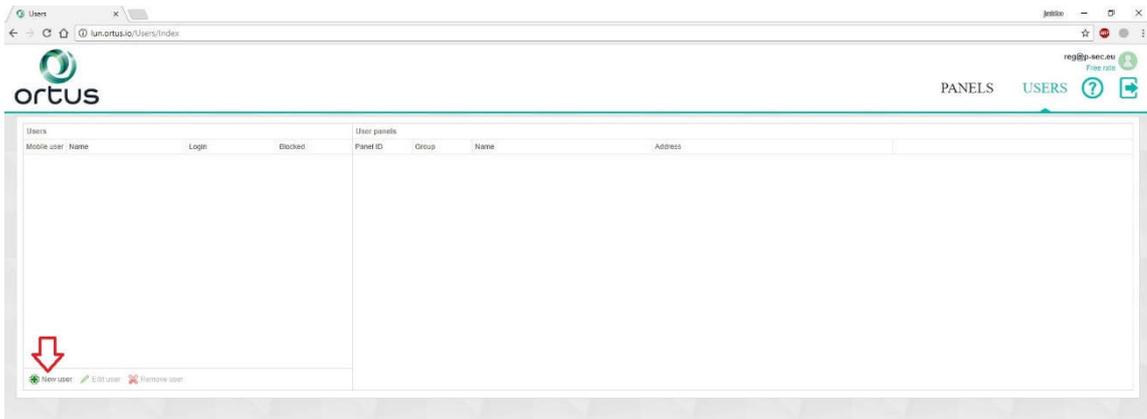


To add a user, click "New user"

1. Enter the first and last name of the user
2. Set the option if the user will use the mobile application
3. Enter the login of the user of "Phoenix-MK" application
4. Enter the user password of the "Phoenix-MK" application and press "ok"




Click "Panels" to go to the object creation section

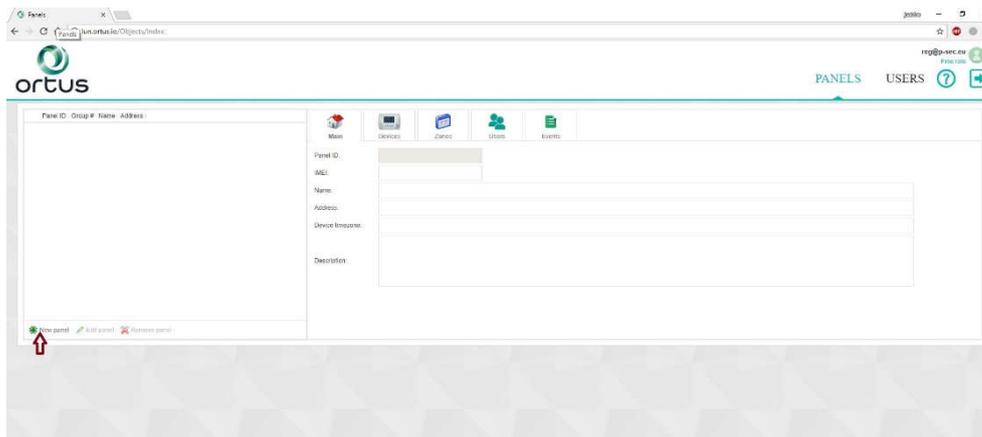


Click "New panel" to create the object

A screenshot of the 'Panel info' form in the ortus application. The form is titled 'Panel info' and contains several input fields. Red arrows with numbers 1 through 7 point to specific fields: 1 points to the 'Panel ID' field (value: 2165), 2 points to the 'IMEI' field (value: 864287039275795), 3 points to the 'Type' dropdown menu (value: Lun-25), 4 points to the 'Device timezone' dropdown menu (value: (UTC) Coordinated Universal Time), 5 points to the 'Enable' checkbox for SIM 1 (checked), 6 points to the 'Test period' dropdown for SIM 1 (value: 00:15), and 7 points to the 'Phone number' input field for SIM 1 (value: +380675551133). Below the 'Channels' section, there are three rows: 'SIM 1', 'SIM 2', and 'Ethernet'. Each row has an 'Enable' checkbox, a 'Test period' dropdown, and a 'Phone number' input field. At the bottom of the form, there are three buttons: 'Previous', 'Next', and 'Finish'.

1. The object number. Assigned automatically.
2. Enter the IMEI that was received in the "Configurator 11" program

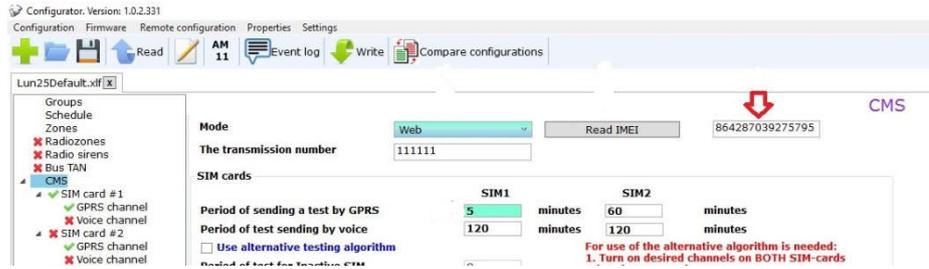


1. Select the Lun-25 device type
2. Choose your time zone.
3. Activate the channel type o your device is working on
4. Set the testing period for the object

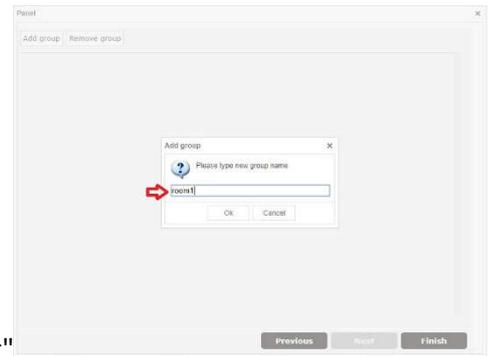


5. Enter the phone number of the SIM card and click "Next"

Enter the name of the group / partition that combines several zones / sensors and click "Ok"

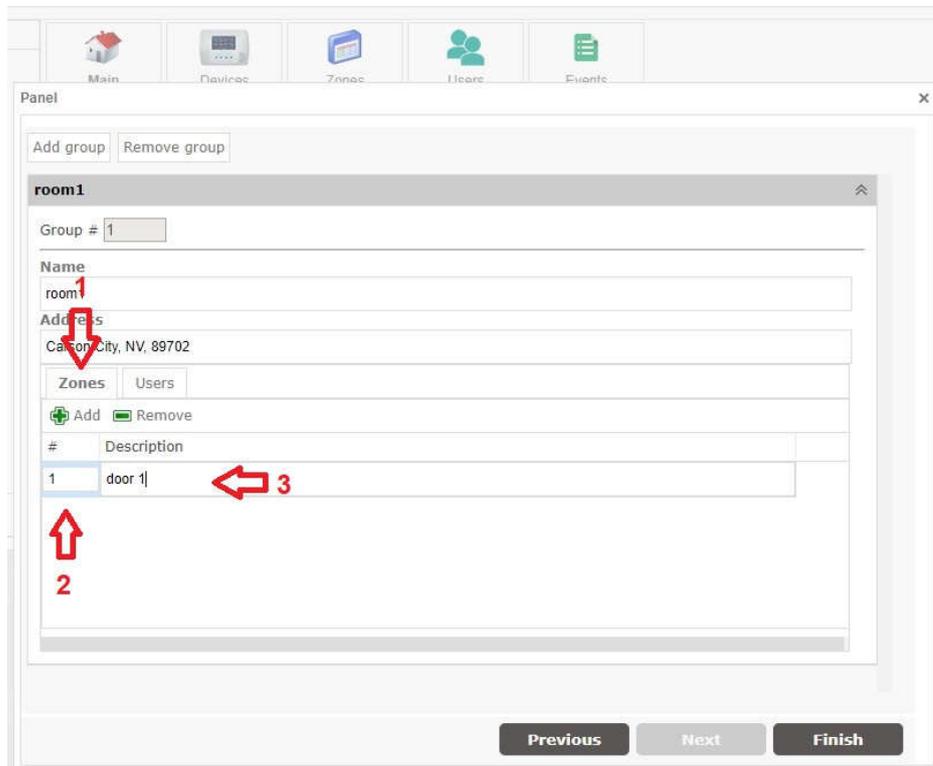

Select the "Zones" tab

1. Click on "Add"
2. Enter the zone number
3. Enter the name of the zone

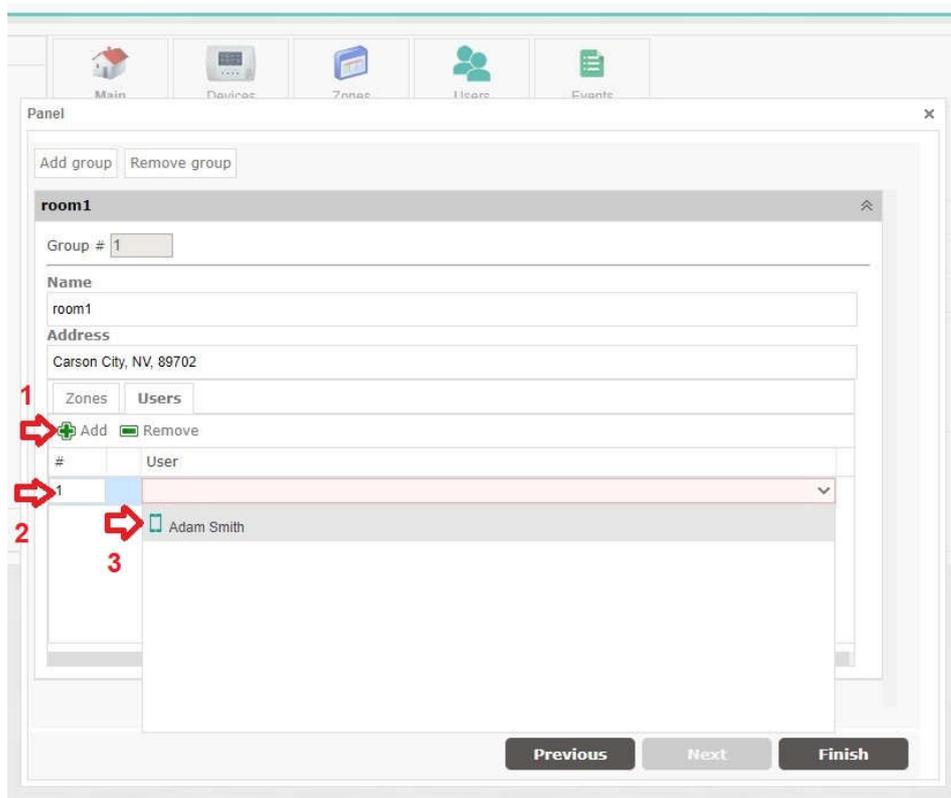

Select the "Users" tab

1. Click on "Add"
2. Enter the user number
3. Select the user from the drop-down list and click "Finish"

Disconnect the configuration cable from the control panel and restart the power. And go to the "Events" section

